

Mercury M5-20IN Intelligent Controller

M5-20IN is a multi-device interface panel for the replacement of the Casi 20DI input control device. As with the entire Mercury M5 Bridge family of controllers, the M5-20IN is built with a matching form factor to the Casi Micro 5 line of access control hardware allowing a fast “screwdriverless” change over and easy migration of a Casi client to any Authentic Mercury software partner.

Built to provide the ability to monitor high concentrations of inputs, this panel offers support for 20 general purpose input circuits capable of being individually set for normally-open or normally-closed operations and can be declared supervised and non-supervised. Individually configurable parameters can be set for sensitivity ranges, timing parameters and end-of-line resistance values. The M5-20IN provides the capacity to link, control and respond to an array of sensors.

Application Notes

The M5-20IN is an integral component in the Mercury M5 Bridge family approach to migrate any Micro 5 installation to the flexible, feature rich Mercury access hardware. This ensures the customer an Open future based on Authentic Mercury controllers.




Features

- 20 programmable inputs
- Plug for plug compatibility to Casi 20DI
- AES 128 bit data encryption
- Universal I/O device Characterization
- Configurable input parameters

Benefits

- Built-in capacity to control, respond to external device commands
 - Easily integrates lighting, heating/cooling, door or elevator control sensors
 - Initiate commands by operator, by time schedules, or by events
 - Built on the Open Authentic Mercury platform
-

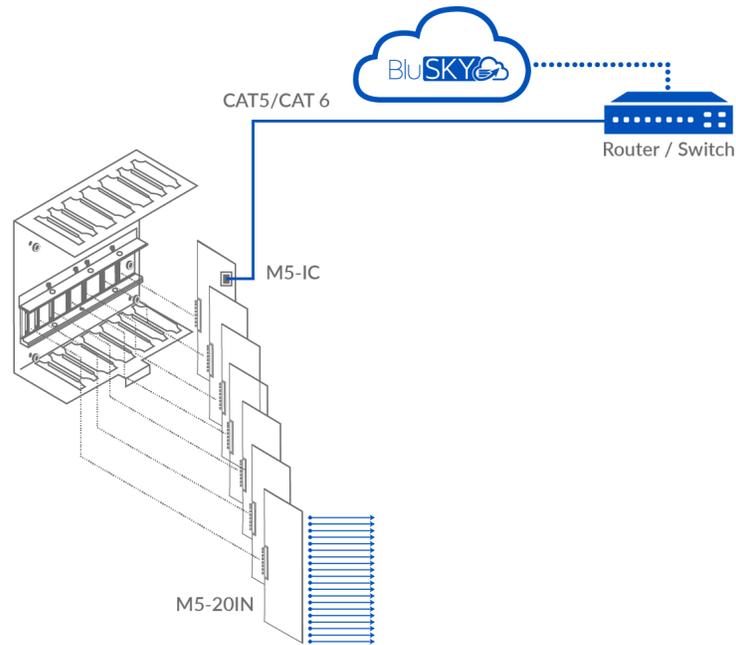

Specifications

Primary Power (from M5-IC):

- 12Vdc +/-10%, 165 mA maximum

Inputs:

- 20 unsupervised/supervised, standard EOL: 1K/1K ohm, 1%, 1/4 watt

Communication:

- Back plane supplied 9600, 19200, 38400, or 115200 bps, asynchronous

Cable Requirements:

- Alarm inputs: 1 twisted pair, 30 ohms maximum

Temperature:

- Storage -55 °C to +85 °C
- Operating 0 °C to +50 °C

Humidity:

- 5 to 95 % RHNC

Standards:

- UL 294 Recognized
- CE Compliant
- RoHS

Size and Weight:

- 0.69"H x 3.5"W x 10.25"L | 4oz. (w/o connectors)

Ordering Information

MFG Part #	BluBØX Order #	Description
M5-20IN	125-1500	Mercury M5-20IN Multi Device Interface Panel Replaces Casi 20DI

BluBØX: Security Re-Imagined

www.blub0x.com

e. info@blub0x.com

p. (844) 425-8209

FOLLOW US ON  

BluBØX Security, Inc. is a manufacturer and service provider of web-cloud based physical security products. Its BluSKY service delivers enterprise class unified access control, alarm management, video surveillance, biometrics and visitor management on any device, anywhere, any time. Its BluCHIP open hardware platform provides industry standard components and a proprietary line of fully integrated multi-factor, multi-biometric Person Readers.