



BluCHIP 4R/16I/12O-E2M

Mercury MR52 Four Reader/Sixteen Input/Twelve Output Addition for Four Doors

The BluCHIP 4R/16I/12O-E2M is a unified Two Reader/Eight Input/Six Output System w/ Managed Lock Power for Four Doors. The kit is configured with space to add backup battery and utilizes an FPO power supply to generate 12 or 24VDC. It includes two Mercury MR52 boards, a locking four door enclosure with tamper, power supply and wiring speed kit. Remote management and reporting of power supply and battery health are available through BluSKY Power Diagnostics.



System Features

FPO offline power supply

- 120 or 230 VAC input
- 12 and 24 VDC outputs
- On board Fire Alarm Interface
- Continuous and resettable DC

Distributed output module

- Four, controlled fused at 3A each
- Eight, auxiliary Class II P limited at 2.5A each

Expansion options

- Increased power, multiple voltages
- Additional distribution outputs
- Power management

Specifications

Input Power:

- Input 120/230VAC 50/60Hz | 100 Watts
- Overload and short circuit protection
- Over temperature protection
- Polarized AC power supply disconnect

Output Power:

- 75W Total Output Power | 12VDC/6A or 24VDC/3A
- FPO Board Outputs: Continuous (DC1), Resettable (DC2)
- 8 Lock Outputs, 8 Auxiliary Outputs, Class 2 PL @ 2.5A
- 120mV Output Voltage Ripple | System Efficiency: 85% | System BTU Rating: 33 BTU/Hr

Battery Charging:

- Independent built-in 1A (FPO75) Charger for sealed lead-acid or gel type batteries
- Microprocessor dual rate charging of 12 or 24V battery sets
- Automatic switchover to standby battery when AC fails
- Zero voltage drop when switched over to battery backup

Enclosure Features

Labor saving design

- Unified power and security in one enclosure
- Pre-wired power section
- Removeable backplate simplifies installs
- Speed kit is included for power and data wiring

Additional benefits

- Wire management room
- 4.5" enclosure depth fits battery set
- Tamper switch, lock, dual key set standard
- Mounting hardware for access boards included

Regulatory Compliance:

- UL294, UL603, UL864, UL1076, UL1481, UL2044, UL2572, ULC S318, ULC S319, ULC S527, CSA C22.2 #107.1, FCC Part 15, CSFM Approved


Access Panel:

- (2) MR52
4 Readers | 16 Inputs | 12 Outputs

Size and Weight:

- 20.00"H x 16.00"W x 4.50"D | 27 lbs.

Recommended board layout

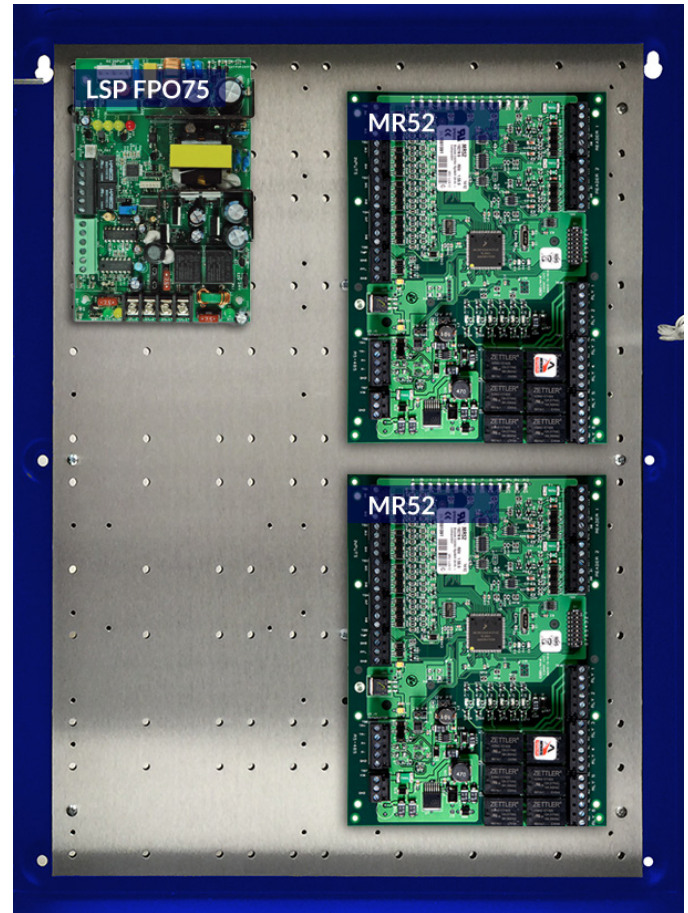

Kit Includes

MFG Part #	BluBØX Order #	QTY	Description
MR52	120-2500	2	Mercury MR52: Two door controller & auxiliary I/O 12/24VDC
E2M-SK-2	577-3000	1	BluBØX E2M-SK-2 Speed Kit: Two board precut DC power and RS485 wiring kit
FPO75-E2M	670-1320	1	LifeSafety Power: Single voltage power supply, includes enclosure

Ordering Information

BluBØX Order #	Description
752-8200	Mercury MR52 Four Reader/Sixteen Input/Twelve Output Addition for Four Doors

BluBØX: Security Re-Imagined

www.blub0x.com

e. info@blub0x.com

p. (844) 425-8209

FOLLOW US ON  

BluBØX Security, Inc. is a manufacturer and service provider of web-cloud based physical security products. Its BluSKY service delivers enterprise class unified access control, alarm management, video surveillance, biometrics and visitor management on any device, anywhere, any time. Its BluCHIP open hardware platform provides industry standard components and a proprietary line of fully integrated multi-factor, multi-biometric Person Readers.